
ADJUST CLAMPING FLANGE SO THAT DIMENSION 'X' IS 5mm WHEN THE TERMINATION HAS BEEN FULLY INSERTED INTO THE RECEPTACLE. ADJUST ORIENTATION OF CLAMPING FLANGE TO MATCH HOLE POSITIONS IN RECEPTACLE. NOTE: ALWAYS ADJUST SO AS TO INCREASE DIMENSION 'X'. ENSURE CLAMPING SCREWS ARE OF SUITABLE LENGTH TO ENGAGE IN THE RECEPTACLE BY 5mm BEFORE THE PRESSURE GAP 'X' IS TAKEN UP. LOCK CLAMPING FLANGE BY TIGHTENING FLANGE GRUB SCREWS AGAINST FERRULE. REMOVE TERMINATION AND GREASE TAPERED SECTION OF RUBBER TERMINATION WITH HIGH VOLTAGE GREASE. REPLACE IN RECEPTACLE AND TIGHTEN DOWN CLAMPING SCREWS EQUALLY. RELEASE SCREWS AND CHECK 'X' IS 5mm. IF NOT RE-ADJUST AS ABOVE. CAUTION:

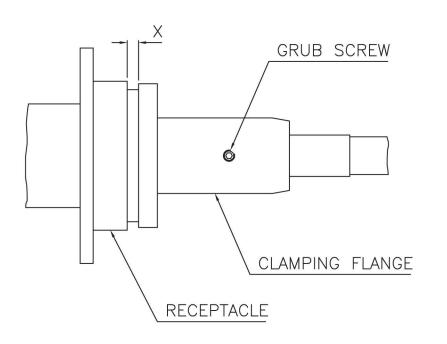

IT IS IMPORTANT TO CHECK DIMENSION 'X' AFTER APPROXIMATELY ONE WEEK. ADJUST AS ABOVE IF REQUIRED.

TECHNICAL DATA:			ACCESSORIES:						INSTALLATION:		
TERMINATION:- ONLY ESSEX X-RAY APPROVED RECEPTACLES TO BE USED.			INSTALLATION GREASE P00075						WARNING: CABLE SHOULD ONLY BE FITTED BY A TRAINED PERSON. CABLE CAN RETAIN ELECTRICAL CHARGE. DISCHARGE TO EARTH BEFORE HANDLING. A SUITABLE HIGH VOLTAGE GREASE SHOULD BE APPLIED TO THE TERMINATION.		
FOR FULL CABLE DATA SEE ESSEX CABLE DA	A SHEET							ENSI	URE THAT THE TERMINATION THE SOCKET BEFORE ADJUSTI		
FEEE×		REVISION	ONS DUE TO CONTINUING PRODUCT DEVELOPMENT ESSEX X-RAY R						RESERVES THE RIGHT TO MODIF	Y DATA WITHOUT NOTICE	
ESSEX		DATE	BY	DRAWN	APPROVED	DATE	ISSUE	SCALE		C NOT TO BE REPRODUCED IN WHOL	OLE OR PART WITHOUT
Dandong Light Electric Co.,Ltd	2	21.12.00	DCN 1409	MGM		29.02.00	4		N.T.S.	PRIOR PERMISSION OF ESSEX X-R	AY & MEDICAL EQUIPMENT LTD.
Rm.1606 Jiadi Square,No.64,Binjiang Middle Rd,	3	07.12.06	I 2090	TITLE		· ·				DRAWING No.	
Zhenxing, Dandong, Liaoning China T:0415-6123232 F:0415-6123533		09.03.09	DCN 2905	FITTING I		INSTRUCTIONS 100		KV TERMINATION		DS1044	